




TRIDENT MARINE®

TRIDENT PLY MARINE WET EXHAUST & WATER

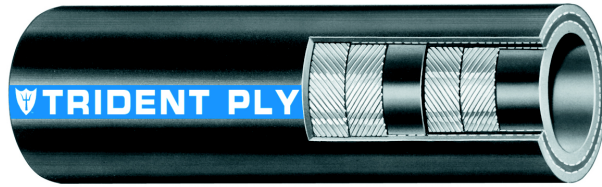

200 Series

Trident Ply marine wet exhaust hose for short, straight connections. In smaller I.D.'s for critical engine coolant & circulation, heat exchanger and discharge uses. Extra heavy tube and cover with 2 to 6 ply reinforcement resists heat, aging, ozone, exhaust and salt water. Exceeds (SAE J2006-R1, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved. Black High Temp EDPM Rubber 280°F (138°C) Max.

Specifications

Construction:

Tube & Cover:
High Temp EDPM Rubber

Color: Black with Blue Stripe

Reinforcement:
Multi-ply, High Tenacity Polyester

Temperature Range:
280°F (138°C)

Lengths:
6.25' (.16m), 12.5' (.32m)

Coils:
25' (.64m) 50' (1.27m)

Part Number	ID		OD		Working Pressure		Weight	
	in.	mm.	in.	mm.	Psi	Bar	Lb./50 ft.	Kg/m
200-1120	1-1/2	38	1.97	50	57	3.9	35	15.8
200-1580	1-5/8	42	2.10	53.3	57	3.9	40	18
200-1340	1-3/4	45	2.23	56.6	57	3.9	43	19.4
200-1780	1-7/8	48	2.35	59.7	57	3.9	45	20.4
200-2000	2	51	2.5	63.5	57	3.9	53	24
200-2180	2-1/8	53	2.62	66.5	57	3.9	58	26.3
200-2140	2-1/4	57	2.75	69.9	57	3.9	63	28.4
200-2380	2-3/8	60	2.88	73.2	57	3.9	68	30.8
200-2120	2-1/2	64	3.06	77.7	57	3.9	75	34
200-2340	2-3/4	70	3.25	82.6	57	3.9	90	40.8
200-2780	2-7/8	73	3.44	87.4	57	3.9		
200-3000	3	76	3.61	91.7	57	3.9		
200-3180	3-1/8	80	3.73	94.7	57	3.9		
200-3140	3-1/4	83	3.75	95.3	57	3.9		
200-3120	3-1/2	90	4.11	104.4	57	3.9		
200-4000	4	102	4.63	117.6	57	3.9		
200-4120	4-1/2	114	5.15	130.8	57	3.9		
200-5000	5	127	5.63	143	57	3.9		
200-6000	6	152	6.75	171.5	57	3.9		
200-8000	8	203	8.75	222.3	57	3.9		
200-10000	10	254	10.75	273	57	3.9		
200-12000	12	305	12.75	323.9	57	3.9		

*Burst Pressure is 4 x Working Pressure